


FORD BRONCO
WITH GEAR TOOTH SENSOR,
1990 AND LATER
VASCAR WIRING DIAGRAM

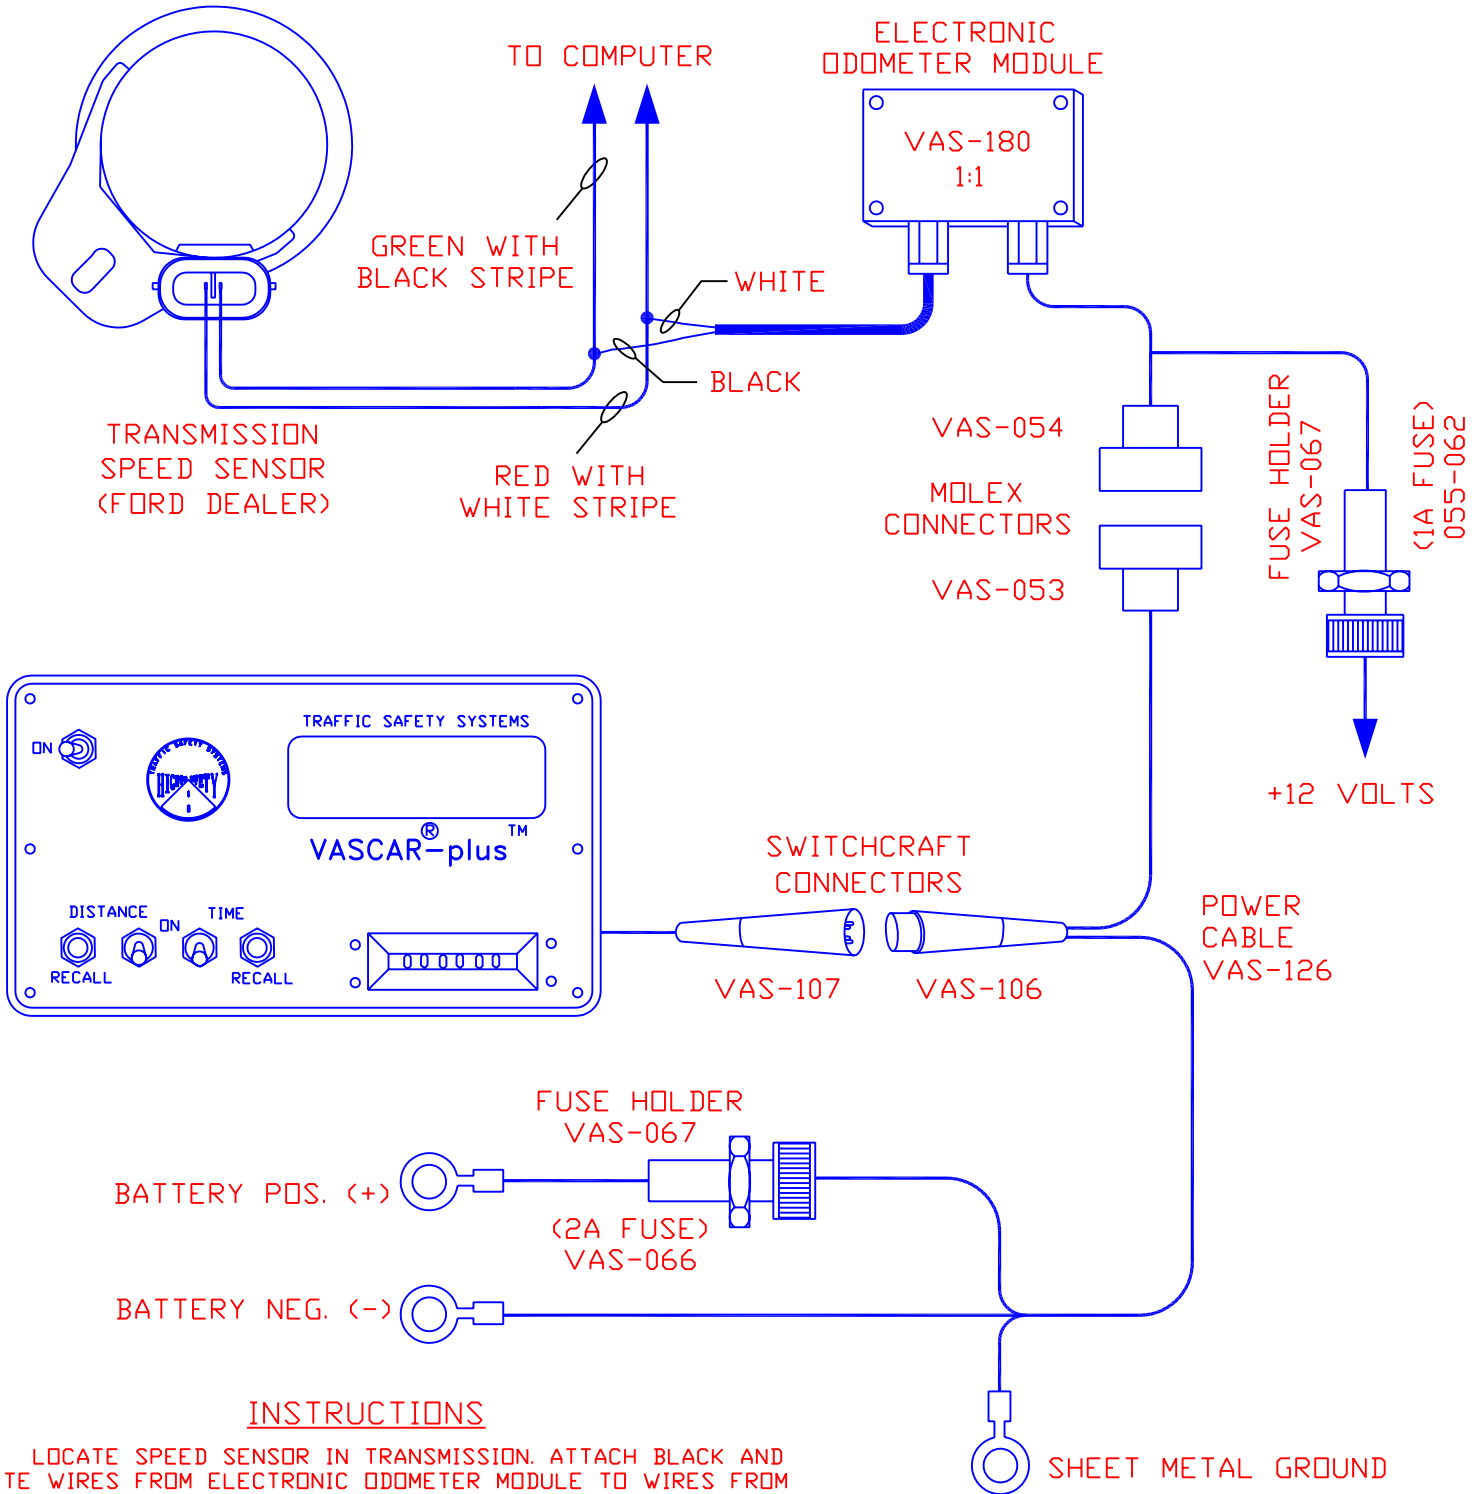

INSTRUCTIONS

LOCATE SPEED SENSOR IN TRANSMISSION. ATTACH BLACK AND WHITE WIRES FROM ELECTRONIC ODOMETER MODULE TO WIRES FROM THE TRANSMISSION SPEED SENSOR. THIS CONNECTION CAN BE MADE BY SOLDERING OR WITH SELF-STRIPPING ELECTRICAL TAP CONNECTORS. DO NOT BREAK THE ORIGINAL SPEED SENSOR WIRE CONNECTION. WHITE MOLEX CONNECTOR PLUGS INTO SIMILAR CONNECTOR IN VASCAR POWER CABLE. RED WIRE WITH FUSE HOLDER ATTACHES TO +12 VOLTS.

TRAFFIC SAFETY SYSTEMS
A DIVISION OF POWER SYSTEMS & CONTROLS, INC.
3206 LANVALE AVE.
RICHMOND, VIRGINIA 23230
(804) 353-3826